


## Technical Specification




|                             |                 |
|-----------------------------|-----------------|
| EIA WR                      | WR34            |
| Frequency Range(GHz)        | 22.0 - 33.0     |
| Attenuation(dB)             | 50              |
| Attenuation Accuracy(dB)    | ±1.0 Max.       |
| Attenuation Sensitivity(dB) | ±0.9 Max.       |
| VSWR                        | 1.20:1 Max.     |
| Average Power(W CW)         | 400             |
| Peak Power(KW)              | 100             |
| Flange                      | FBP260(UBR260)  |
| Material                    | Al              |
| Size(mm)                    | 299.7 x 80 x 47 |
| Net Weight(Kg)              | 0.68 Around     |

## Outline Drawing (Size: mm)

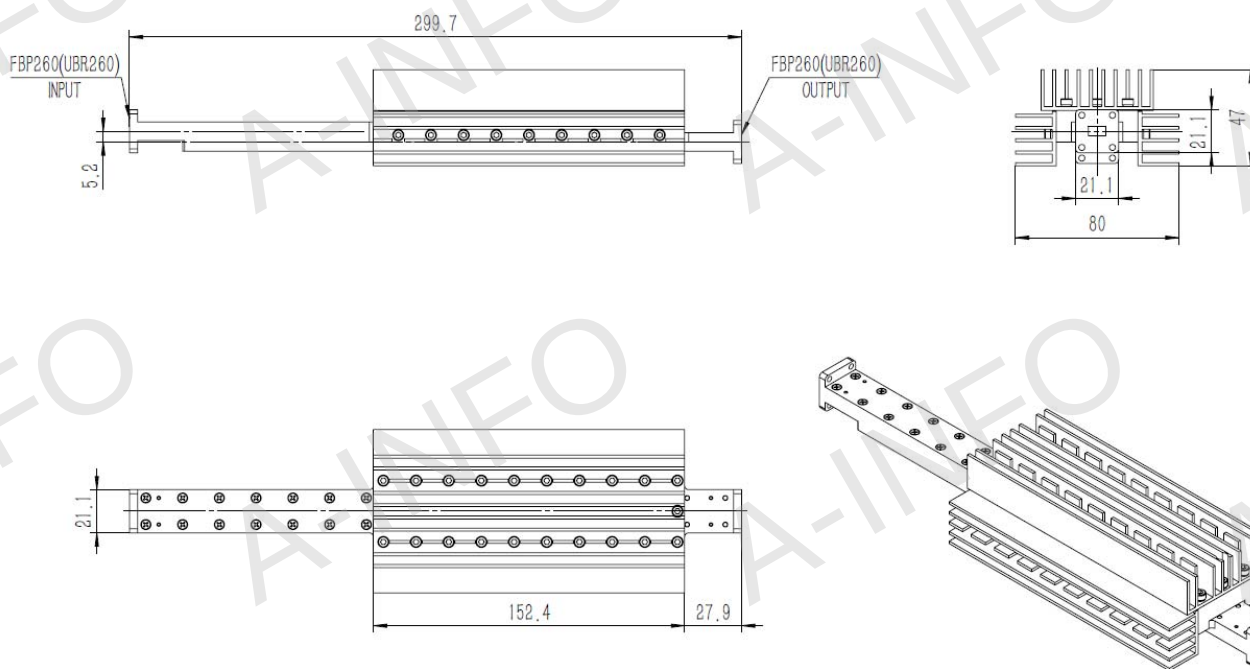

## Flange Drawing (Size: mm)

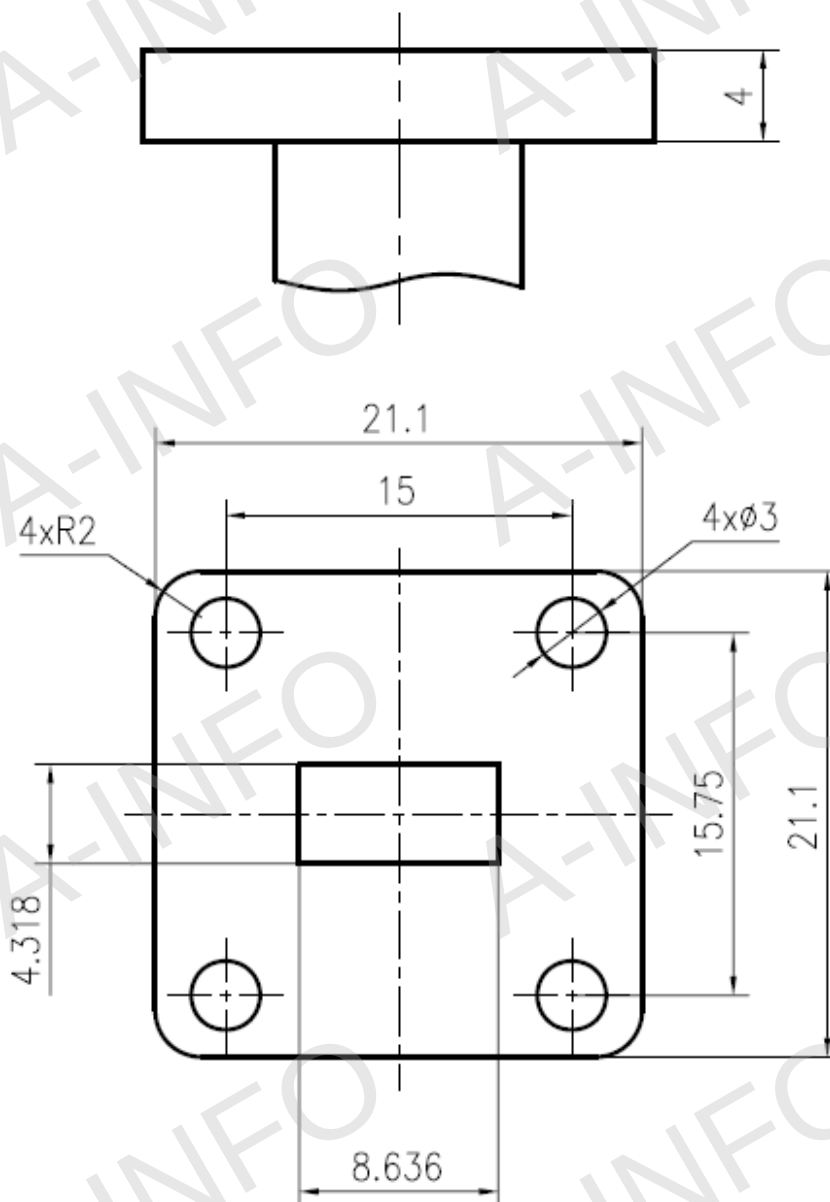

FBP260

AINFO Inc.

Page 2 of 3

China(Beijing):  
China(Chengdu):  
USA :

Tel: (+86) 10-6266-7326,  
Tel: (+86) 28-8519-2786,  
Tel: (+1) 949-639-9688,

(+86) 10-6266-7327  
(+86) 28-8519-3044  
(+1) 949-639-9608

Fax: (+86) 10-6266-7379  
Fax: (+86) 28-8519-3068  
Fax: (+1) 949-639-9670

Website: [www.ainfoinc.com](http://www.ainfoinc.com)  
Email: [sales@ainfoinc.com](mailto:sales@ainfoinc.com)

## Test Result

### Attenuation & VSWR

