
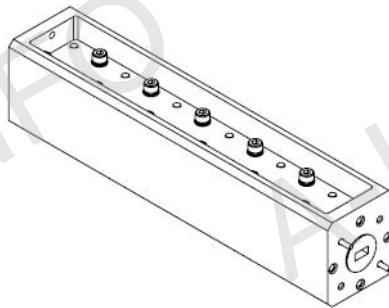


| | |
|-----------------------------|-----------------------|
| Frequency Range(GHz) | 33.0-50.0 |
| Waveguide | WR22 |
| Attenuation(dB) | 30 |
| Attenuation Accuracy(dB) | ±1.3 Max. |
| Attenuation Sensitivity(dB) | ±0.9 Max. |
| VSWR | 1.15 Max. |
| Average Power(W) | 0.5 CW |
| Peak Power(KW) | 0.5 |
| Flange | FUGP400 (UG-383/U) |
| Material | Cu |
| Net Weight(Kg) | 0.62 Around |

Outline Drawing (Size: mm)

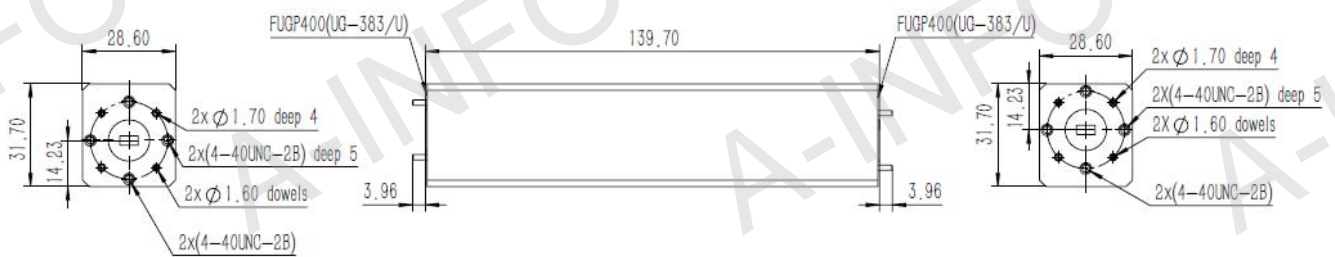

AINFO Inc.

Page 1 of 2

China(Beijing):
China(Chengdu):
USA :


Tel: (+86) 10-6266-7326,
Tel: (+86) 28-8519-2786,
Tel: (+1) 949-346-7326,

(+86) 10-6266-7327
(+86) 28-8519-3044
(+1) 949-639-9660

Fax: (+86) 10-6266-7379
Fax: (+86) 28-8519-3068
Fax: (+1) 949-639-9659

Website: www.ainfoinc.com
Email: sales@ainfoinc.com

Flange Drawing (Size: mm)

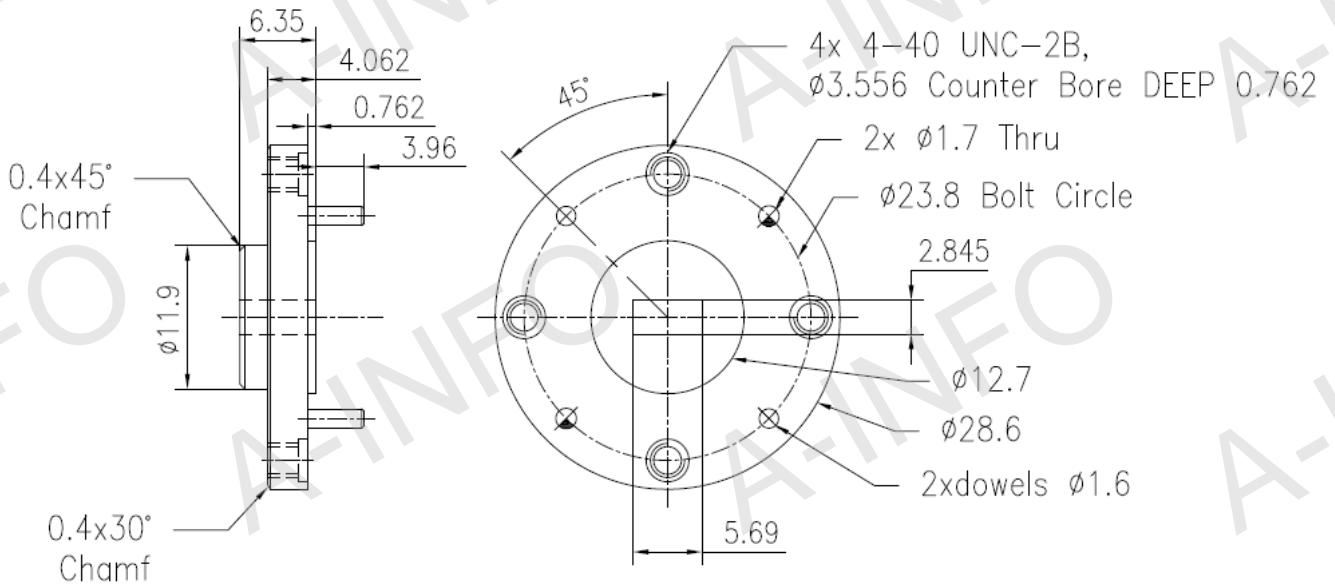

FUGP400
(equivalent to UG-383/U)

Test Results

