

ABS-MLE


Thin flexible microwave elastomer absorber

ABS-MLE is a thin urethane absorber with magnetic loading. The absorber is designed for the suppression of surface currents and cavity resonances applications for a very broad frequency range. The urethane based material is easy in bonding. For harsh environments and high temperature applications also the silicone based ABS-MLSE can be applied.

Applications:

- Lining cavities typically to supress standing waves and surface currents.
- When bonded to a metal surface the material will reduce the reflectivity level of the metal object.
- Antenna elements are often equipped with ABS-MLE to reduce side lobes and improve the antenna pattern
- LNB's, waveguides, amplifiers, converters and oscillators are often equipped with ABS-MLE to improve RF-stability by improving attenuation

Specifications:

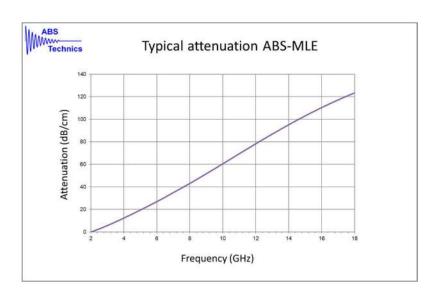

Properties:

Frequency range : > 4 Ghz up to 60 GHz

Hardness: 90 Shore A

Maximum service temperature : -40°C up to 120°C.

The information in this technical data sheet is believed by ABS Technics to be accurate and reliable. ABS Technics makes no representations or warranties of any kind on this data. All specifications can be subject to change without any notice. ABS Technics shall not be liable for incidental or consequential damages of any kind due to the usage of their material. All ABS Technics products are sold pursuant to our 'Terms and Conditions of Sale'.





Availability:

Besides standard outside dimensions (305x305x1mm) also specific or customized thickness, sizes and shapes can be supplied.

ABS-MLE is available in several thicknesses to suite the available space in the applications.

The urethane version assures a good and easy bonding process using self-adhesive tape.

By itself the material has very high mechanical strength and excellent abrasion resistance.

The information in this technical data sheet is believed by ABS Technics to be accurate and reliable. ABS Technics makes no representations or warranties of any kind on this data. All specifications can be subject to change without any notice. ABS Technics shall not be liable for incidental or consequential damages of any kind due to the usage of their material. All ABS Technics products are sold pursuant to our 'Terms and Conditions of Sale'.