


>368,688789 12437,23-2933 977 56-203 88849<
>163,65546 67818,7-23967 911 56-203 88861<
>198,65546 65612,23-2829 955 56-203 46549<
>198,65546 65612,23-2829 95556-203 46549<
>152,698016 68818,23-2399 92356-203 85549<
>198,643836 78617,73-2289 783 56-203 55549<
>124,634546 78672,23-7779 683 56-203 88349<
>458,11142 83417,73-2337 876 56-203 83339<
>145,523286 64486,22-2889 966 56-203 88849<
>868,688789 12437,23-2933 977 56-203 55549<



DATA SHEET

MODEL 2100B

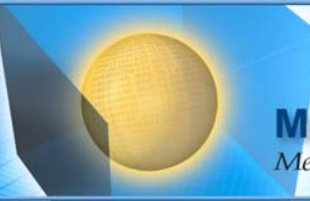

Power Calibration System

- **600 Volt - 100 Amp**
- **Watt Hour & Energy Meter Calibration**
- **Uncertainty to <30 PPM**
- **Menu Driven Software**
- **All Power Factors, Leading & Lagging**

MODEL INFORMATION

The Model 2100B is designed to generate voltages up to 600V and currents to 100A at any power factor from zero lag through unity to zero lead. Completely automated, the 2100B is ideal for calibrating wattmeters, energy meters, watt hour meters, watt transducers and VA measurements to <30 PPM.

Traceability is provided through a built in standard resistor for in-phase measurements and a standard capacitor for quadrature measurements. The system is also capable of calibrating the Model 2100B's own internal resistance standard directly against an external standard. A controller and software are used to control

the units together using an IEEE 488 interface. The system is supplied in a 1.8 meter equipment rack on castors for mobility. The rack is equipped with a pull out tray for placing the unit under test (UUT). All connections to the UUT are made from the front panel of the system. Up to three (3) wattmeters can be calibrated at a time.

The system is comprised of a Power Comparator Model 2000B, a 10mA in phase Quadrature Current Source Model 2002, a Transconductance Amplifier Model 2701A, an Auto Ranging Current Transformer Model 2003A/100, a Detector Amplifier Model 2001B and an



>000.000789 12431.220000 911 56-203 88849
 >163.65546 67818.7 23987 911 56-203 88849
 >198.65546 65612.23 2829 95556 203 46549
 >152.698016 68818.28 2399 92356 203 85549
 >198.643636 78617.73 2289 783 56-203 55549
 >124.634546 78672.23 7779 683 56-203 88349
 >458.11142 83417.73 2397 876 56-203 83339
 >145.523286 64486.22 2689 986 56-203 88849
 >368.688789 12437.23 2833 977 56-203 55549



AC Precision Divider. A commercially available AC Source with high current option is required as the AC source and a commercially available AC/DC Transfer Standard is required to measure the AC voltage.

Several wattmeters, DVM's and AC/DC Transfer Standards have drivers built into the system software. The source code maybe purchased from MI allowing other measurement devices to be added at anytime.

The 2100B Reference Power Calibration System is a fully automated and programmable primary standard for AC power measurements. It can be used for calibrating both active and reactive power and energy meters under sinusoidal conditions. Traceability for the measurements is provided by a standard resistor and standard capacitor internal to the Model 2002 current source, the AC/DC Transfer Standard and the uncertainty of the Model 2501A High Voltage Divider. The resistor, capacitor and high voltage divider are supplied with calibration reports when the system is calibrated prior to shipment.

Software menus allow for changing voltages, currents, power factors and number of readings easily. The Mean, Sigma, Standard Deviation and Variance are calculated and displayed on the system calibration report.

The system, utilizing our Model 2000B AC Comparator and 2001B Detector, is capable of calibrating the standard resistor against external standards to better than 3 PPM uncertainty. The Model 7050, 12K Ohm AC Standard Resistor, may be sent out for calibration periodically.


The 2100B Power Calibration System includes our Model 2501A AC Precision Divider. The 2501A has ranges of 600, 480, 240 & 120 volts with uncertainties of less than 10 PPM. The AC/DC Transfer Standard is not exposed to voltages greater than 120V. Accuracy of the system is based on the uncertainty of the resistor, capacitor and the input voltage via an automated AC/DC Transfer Standard and the uncertainty associated with the 2501A High Voltage Divider. The resistor and capacitor included in the Model 2002 current source are supplied with a National Research Council of Canada (NRCC) calibration report. Calibration of the resistor and capacitor are performed at the test voltage of the system; 120 volts, 50 or 60 Hz.

Model 2100 Power Reference System Software Main Menu

MEASUREMENTS INTERNATIONAL PRESCOTT, ONTARIO, CANADA		
SELF-BALANCING POWER & ENERGY CALIBRATION SYSTEM		
POWER CALIBRATION		<E> - ENERGY <P> - POWER
Actual Parameters	<F1=Start Balancing>	Ready For Balancing
AC Voltage - <F2=Change> 100.0000 Vrms +/- 2.00ppm	<F12=No of Measurements> 5	Reference Capacitor 1000.0000pF +/- 2.0 ppm
Current/Power Fact. Pairs Entered: 1 <F3=Change>	<F11=Set Readings To Mean> 5	Reference Resistor 11.999436KΩ +/- 2.1 ppm
Wattmeter: none Voltmeter: not used	<F7=Choose Wattmeter> <F10=Printer On/Off>	<Ctrl+F5=New Value of C> <Ctrl+F6=New Value of R>
<F4=Set Waiting Time> 4 sec	Frequency 50 Hz +/- 2.0 ppm	<F8=Exit To DOS>



Flow Chart of Power Calibration System

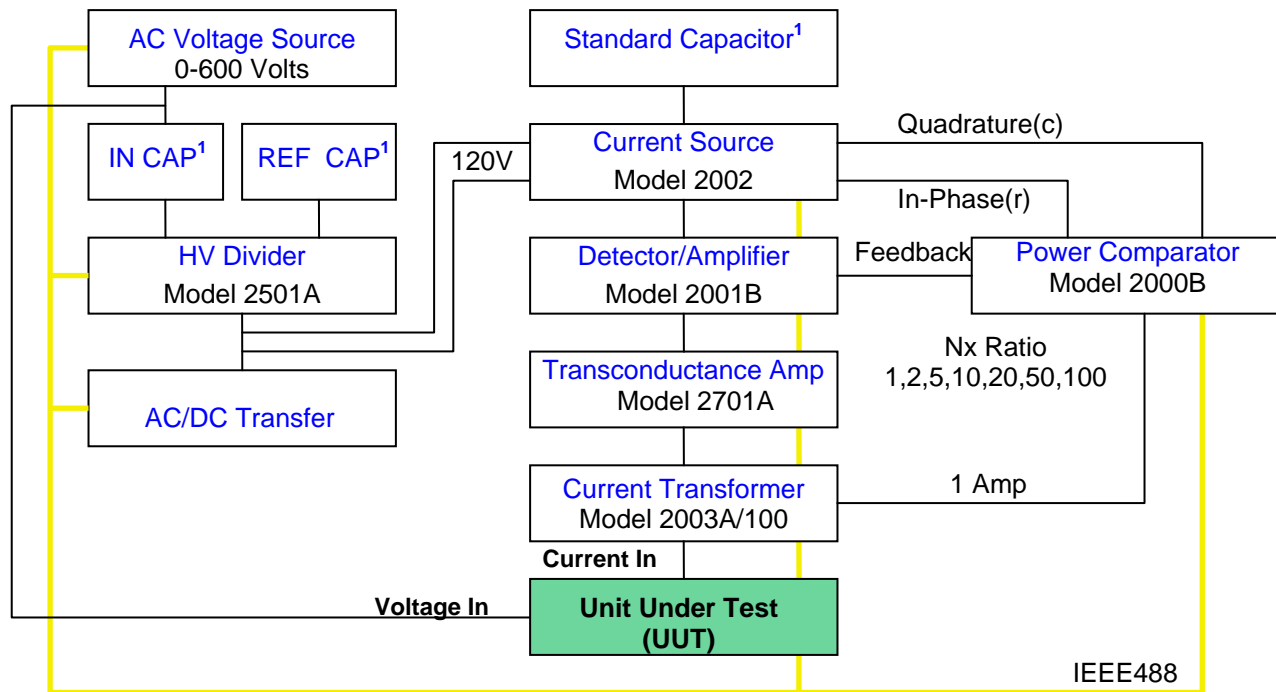

Note 1: All Capacitors are 1000pF

Specifications:

Output Voltage	600 Volts Maximum
Voltage Accuracy	15 PPM
Output Current	100 Amps Maximum
Current Accuracy	10 PPM
Test Frequency	50, 60 and 400 Hz
Current Ratios	1, 2, 4, 10, 20, 40, 100, 200
Power Factor	-0 to 1 to +0 (All)
Power Accuracy	<30 PPM Magnitude <30 PPM Quadrature
Operating Environment	18 to 34°C, 10 to 80% RH

>368,688789 12437,23 2833 977 56-203 88849<
 >163,65546 67818,7 23987 911 56-203 88849<
 >198,65546 65612,23 2829 955 56-203 46549<
 >198,65546 65612,23 2829 95556 203 46549<
 >152,698016 68818,28 2399 92356 203 85549<
 >198,643636 78617,73 2289 783 56-203 65549<
 >124,634546 78672,23 7779 683 56-203 88349<
 >458,11142 83417,73 2397 876 56-203 83339<
 >145,523286 64486,22 2689 986 56-203 88849<
 >368,688789 12437,23 2833 977 56-203 55549<



Product Details	
Warranty	2 Year Parts & Labor
Dimensions	1.8 Meter Rack, 484 mm Width
Weight	350 kg
Shipping Weight	400 kg
Operating Power	100, 120, 220, 240Volts - 50/60 Hz

SELF-BALANCING POWER & ENERGY REFERENCE CALIBRATION SYSTEM TYPICAL CALIBRATION REPORT

Wattmeter Under Test: MIL 2010A Serial Number: 950701
 Voltmeter: Not Used
 Time: 09:15:22 Date : 06-11-1997

WATTMETER RANGE
 Voltage [V]..... 120
 Current [mA].... 1000
 SI UNITS.....WATTS

TEST CONDITIONS

Voltage [V].....120 +/- 1.00 ppm
 Current[mA].....1000 mA
 Power Factor... 1

MIL Watts	MIL Uncertainty	Test Watts	Test Uncertainty	Test Error
+120.0000	+4.73	+120.0005	+5.49	+4.35
+120.0000	+4.73	+120.0003	+5.37	+2.29
+120.0000	+4.73	+120.0004	+5.28	+3.43
+120.0000	+4.73	+120.0004	+5.68	+3.23
+120.0000	+4.73	+120.0006	+5.25	+5.24
+120.0000	+4.73	+120.0004	+6.02	+3.67
+120.0000	+4.73	+120.0005	+5.57	+4.20
+120.0000	+4.73	+120.0003	+6.10	+2.86
+120.0000	+4.73	+120.0007	+5.23	+5.44
+120.0000	+4.73	+120.0007	+5.32	+5.93

Test Meter	
=====	
MEAN.....	+4.06
SIGMA.....	+0.38
STD.DEVIATION.....	+1.19
VARIANCE.....	+1.41

Revision 2

MI-Canada
 Measurements International Ltd.
 PO Box 2359, 118 Commerce Drive
 Prescott, Ontario, Canada K0E 1T0

Phone: (613) 925-5934

Toll-Free: 1-800-324-4988
 Fax: (613) 925-1195
 Email: sales@mintl.com

MI-USA
 Measurements International Inc.
 812 Proctor Ave.
 Ogdensburg, NY, USA 13669

Phone: (315) 393-1323

Toll Free: 1-800-324-4988
 Fax: (315) 393-1452
 Email: sales@mintl.com

MI-Europe
 Druzstevni 845
 686 05 Uherske Hradiste
 Czech Republic

Phone: (420) 572 572 801
 Fax: (420) 572 572 358
 Email: mieurope@mintl.com

www.mintl.com

