

>566,688789 12437,23 2933 977 56-203 88849<
>163,65546 67818,7 23967 911 56-203 88849<
>198,65546 65612,23 2829 955 56-203 46549<
>198,65546 65612,23 2829 95556-203 46549<
>152,698016 68818,23 2399 92356-203 85549<
>198,643636 78617,73 2289 783 56-203 55549<
>124,634546 78672,23-7779 683 56-203 88349<
>458,11142 83417,73-2337 876 56-203 83339<
>145,523286 64486,22 2889 966 56-203 88849<
>868,688789 12437,23 2933 977 56-203 55549<

DATA SHEET

MODEL 6000B



Automated High Resistance Ratio Bridge

- Cutkosky Divider
- Range: 1k to 1T Ohm
- 4 Channel Matrix Scanner
- IEEE488 Interface
- Self Balancing - Self Calibration

MODEL INFORMATION

The Model 6000B is a fully automated bridge using the Cutkosky Divider principle. Maximum voltage for the 6000B is 110 Volts. This technology offers new solutions for measuring high value resistors more accurately and at lower currents. The Cutkosky or Binary Voltage Divider Technology, solves all errors normally associated with a direct current comparator while offering significantly improved uncertainties. An internal guard circuit is used to guard the measuring circuit. This guard may also be used to drive the measuring leads, a guarded detector and resistor enclosures to increase the effective insulation resistance and improve overall performance.

Measurements International's (6000SW) operating software is available for Windows (98 or newer) platforms. The system requires a stable 100V source (Model 1000A) and a DVM Detector (Fluke 8842A, HP 3458A). Optimum performance is achieved using the HP 3458A as a guarded detector.

The Model 6000B has a four-channel matrix scanner with inputs labeled R1, R2, R3 and R4. The number of inputs can be expanded to 40 when the 6000B is used in conjunction with Models 4210A and 4220A, ten and

twenty channel, Low Thermal Four Terminal Matrix Scanners.

Calibration of the 6000B is performed easily and automatically. Calibration data is stored to file for history analysis. New calibration data is compared to the last calibration data for tracking drift of the BVD.

The principle of the 6000B Automatic Potentiometer is based on the Binary Voltage Divider (BVD). The reference to the BVD is supplied from a stable voltage reference, Model 1000A. The Model 1000A is a low drift, stable, noise free 100-Volt Source. The 100V reference is connected to the rear of the 6000B Source input terminals. The DMM detector with an input impedance of 10GΩ or higher is used to measure the difference between the output of the BVD and the voltage under test. An isolated guard circuit is provided to guard the BVD and the DMM detector when performing measurements. The guard voltage can also be used to drive the cans and/or shields of resistors under test to reduce leakage problems between the case and the resistor.



System Software and Applications:

The Measurements International's 6000SW controls all of the above automatically. The software features report generation, historical analysis, while tracking and correcting for resistor drift rates. All measurement data is displayed in graph form as the measurement progresses. All uncertainties are calculated at 2 sigma. The software allows selection on standard deviation and uncertainty calculations.

For SR104 measurements, the 6000SW allows users to measure the temperature of the SR104 at time of measurement using an external thermistor. The thermistor is placed in the well of the SR104 and is measured against a 1MΩ reference resistor. The 1MΩ standard resistor is used to keep the current in the thermistor as low as possible as not to cause self heating in the well of the SR104. The software can

then correct the value of the SR104 back to 23 or 25° C.

The 6000B can also be used in conjunction with Measurements International's Model 4220A and 4220-1 interface adapter for calibration of SR1010 series of Hamon resistance boxes.


Combined with the Measurements International Model 9300A air bath, alpha and beta calculations can be performed automatically on resistors under test. All data can be exported directly to Excel for various test patterns or mainframe applications. External atmospheric pressure, humidity and temperature indicators are optional and the entire system can be enclosed in a 4 or 6 ft. rack. Resistor baths (oil or air), instrument controllers, printers, system software, IEEE interface, installation and training are all available for complete system packages.

System Requirements:


To run the MI Software (6000SW) requires a computer, PIII or higher, with 128 MB of RAM, Windows 98 or newer and a National Instruments IEEE488 Interface Card (not included).

6000SW – Windows Operating Software:

Setup Menu

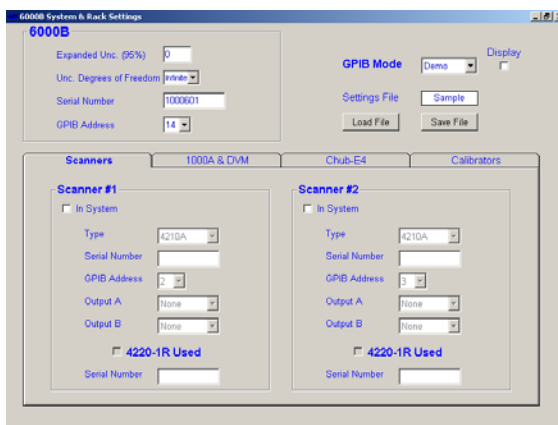

Resistor ID Menu

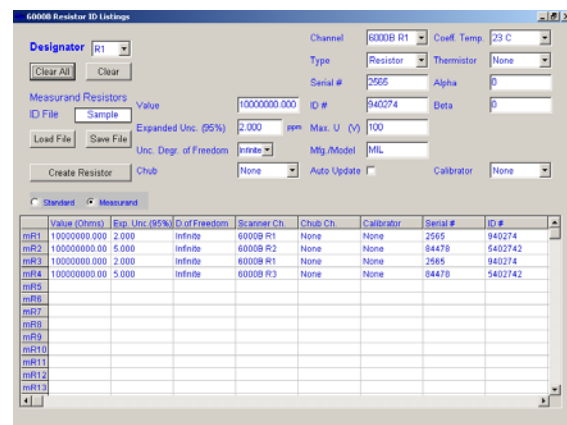

Program ID Menu

Measurement Menu

History Menu

Calibration Report

Measurements International's 6000SW was developed by metrologists for metrologists. The software features real time uncertainty analysis, graphing, history logging and graphing, data storage with export to Excel and regression analysis. The 6000SW provides ultimate programmability and control for all your resistors and temperature calibrations, now and in the future.



>368,688789 12437,23-2833 977 56-203 88849<
 >163,65546 67818,7-23987 911 56-203 88849<
 >198,65546 65612,23-2829 955 56-203 46549<
 >198,65546 65612,23-2829 95556-203 46549<
 >152,698016 68818,28-2399 92356-203 85549<
 >198,643636 78617,73-2289 783 56-203 55549<
 >124,634546 78672,23-7779 683 56-203 88349<
 >458,11142 83417,73-2397 876 56-203 83339<
 >145,523286 64486,22-2689 986 56-203 88849<
 >368,688789 12437,23-2833 977 56-203 55549<



Specifications:

| Resistor Range | Accuracy (95%) (2s) Ratio 0.1 Through 10 | Applied Voltage |
|--|---|-------------------------------|
| 1k to 10k Ohm | <0.1 ppm | 1, 2, 5, 10, 20 |
| 10k to 100k Ohm | <0.1 ppm | 10, 20, 50 |
| 100k to 1M Ohm | <0.1 ppm | 10, 20, 50, 100 |
| 1M to 10M Ohm | <0.1 ppm | 10, 20, 50, 100 |
| 10M to 100M Ohm | <0.5 ppm | 10, 20, 50, 100 |
| 100M to 1G Ohm | <5 ppm | 10, 20, 50, 100 |
| Measurements Above 1G Ohm Require Special Resistor Configurations | | |
| 10G Ohm | <20 ppm | 10, 20, 50, 100 |
| 100G Ohm | <200 ppm | 10, 20, 50, 100 |
| 1T Ohm | <500 ppm | 10, 20, 50, 100 |
| Ratio 100:1 | <2 ppm | 10, 20, 50, 100 |
| Ratio 1000:1 | <20 ppm | 10, 20, 50, 100 |
| Linearity | | 0.01 ppm |
| Short Term Drift (2 hours) stabilization) | | < .2 ppm for 8 hours |
| Operating Environment | | 18 to 34°C, 10 to 80% RH |
| Product Detail | | |
| Warranty | | 1 Year Parts & Labor |
| Dimensions (W x D x H) | | 450 x 420 x 280 mm |
| Weight | | 15 kg |
| Shipping Weight | | 20 kg |
| Operating Power | | 100, 120, 220, 240V - 50/60Hz |

MI-Canada

Measurements International Ltd.
 PO Box 2359, 118 Commerce Drive
 Prescott, Ontario, Canada K0E 1T0

Phone: (613) 925-5934

Toll-Free: 1-800-324-4988
 Fax: (613) 925-1195
 Email: sales@mintl.com

MI-USA

Measurements International Inc.
 812 Proctor Ave.
 Ogdensburg, NY, USA 13669

Phone: (315) 393-1323

Toll Free: 1-800-324-4988
 Fax: (315) 393-1452
 Email: sales@mintl.com

MI-Europe

Druzstevni 845
 686 05 Uherske Hradiste
 Czech Republic

Phone: (420) 572 572 801
 Fax: (420) 572 572 358
 Email: mieurope@mintl.com

www.mintl.com

